

# Calere Sauna Glass Wall installation manual

Preparing the installation / before installation

Put on the ground for glasses soft material / cardboard / carpet. Put also soft material between glass and wall.


**Never put glasses on hard surface ! Tempered glass may shatter if corners and edges come into contact with hard surface!**

Please check that you have received following products / units

- glasses
- hinges
- handle
- upper glass glass fittings (if you have order your glass wall with upper glass for door)
- aluminum list ( F-profile for ceiling installation) and U-profile for side glass (es)
- glass wedges ( 2 pieces / glass). You may install these between glass and aluminum profile/lath.

Install glasses in following order:

First always install the side glasses. Secondly install the upper glass for door. Last install door.

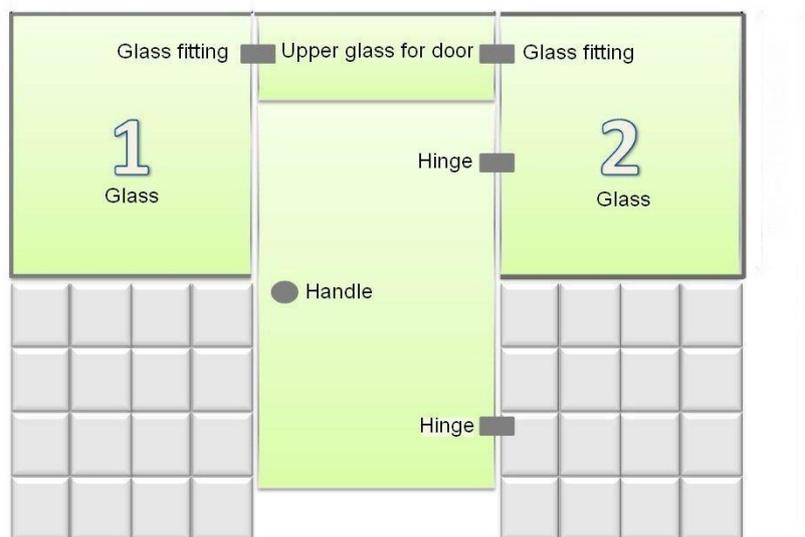

## Installation of side glasses

Measure and mark the line for aluminum profiles. Use level laser if you have it.

Aluminum profiles are never in right measurement. Saw or cut them in right measurements.

Screw tight F-aluminum profile in ceiling. Screw or glue U-aluminum profiles on wall and floor. We recommend to use the HPX-tape. It's sold in WEB-shop.

Install glass wedges between glass and aluminum profile, 100 mm from end of profile.

Lift the glasses inside aluminum profiles. Please see below picture.



If your door hole is bigger than side glass you can use door hole when installing side glasses.

## Installation of upper glass for door

Upper glass has holes for safety / secure pin.

Put the secure pins through holes in upper glass and side glass.

Look that side glasses are in right position in door hole.

Look also that side glass is in right vertical position.

Leave between door glass and upper glass min. 5 mm

Place fitting in right horizontal position and screw glass fittings tight.

Glass fitting from glass to glass



Glass fitting from glass to wall




## Installation of glass door

Fasten hinges in door glass. Please note that there must be both side seal. Never put glass directly on metal surface.

If the door is being installed with wall hinges, leave 5 mm between door glass and upper door glass. Put wooden material beneath door glass in order to lift door glass. Note that the door should be in right vertical and horizontal position. If you have level laser you can mark the line of glass wall with door line.

Mark on wall the hinges screw holes and drill holes. Clean holes and put there silicone sealant. Put inside holes wall plugs. Install hinges. Use still wooden material beneath the door glass and lift it and fasten it to hinges.

If door glass will be installed to side glass use wooden material beneath door glass

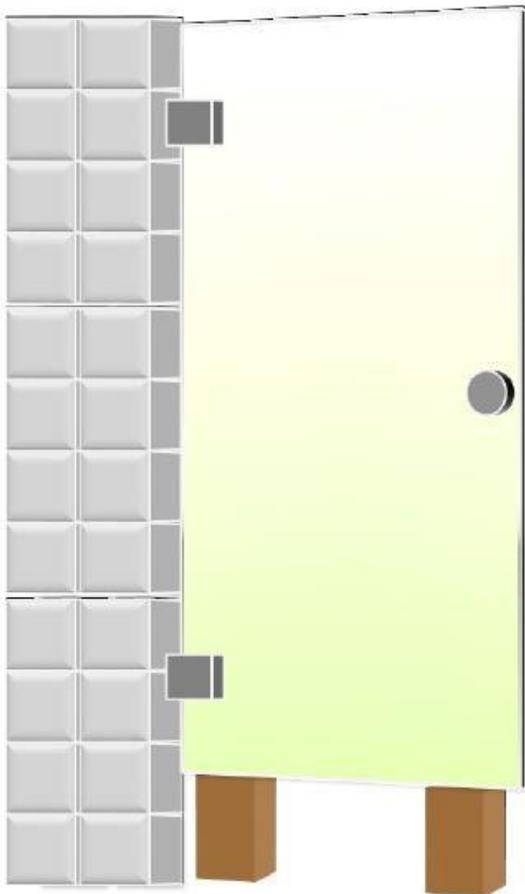

Adjust door line and opening with hexagon socket key / allen key. Please look separately manual inside hinges product box.

## **Install handle**

There is hole (s) in door glass. Put handle secure pin through hole and tighten handle to door.

## **Care**

To ensure that the door lasts for years to come, we recommend regularly washing the door with glass cleaning agents, adjusting hinges and tighten clamps/fittings if needed so the door can easily be opened and closed. Warranty doesn't cover uncared products.

Sisusta Lasilla Ltd

Hyljelahdentie 19 as 23

02260 Espoo Finland

phone +358 40 480 8274 e-mail:

myynti@sisustalasilla.fi